


# ACP-5210

21.5" Fanless Multi-Touch Panel PC with AMD G-Series T56N, 2GB RAM

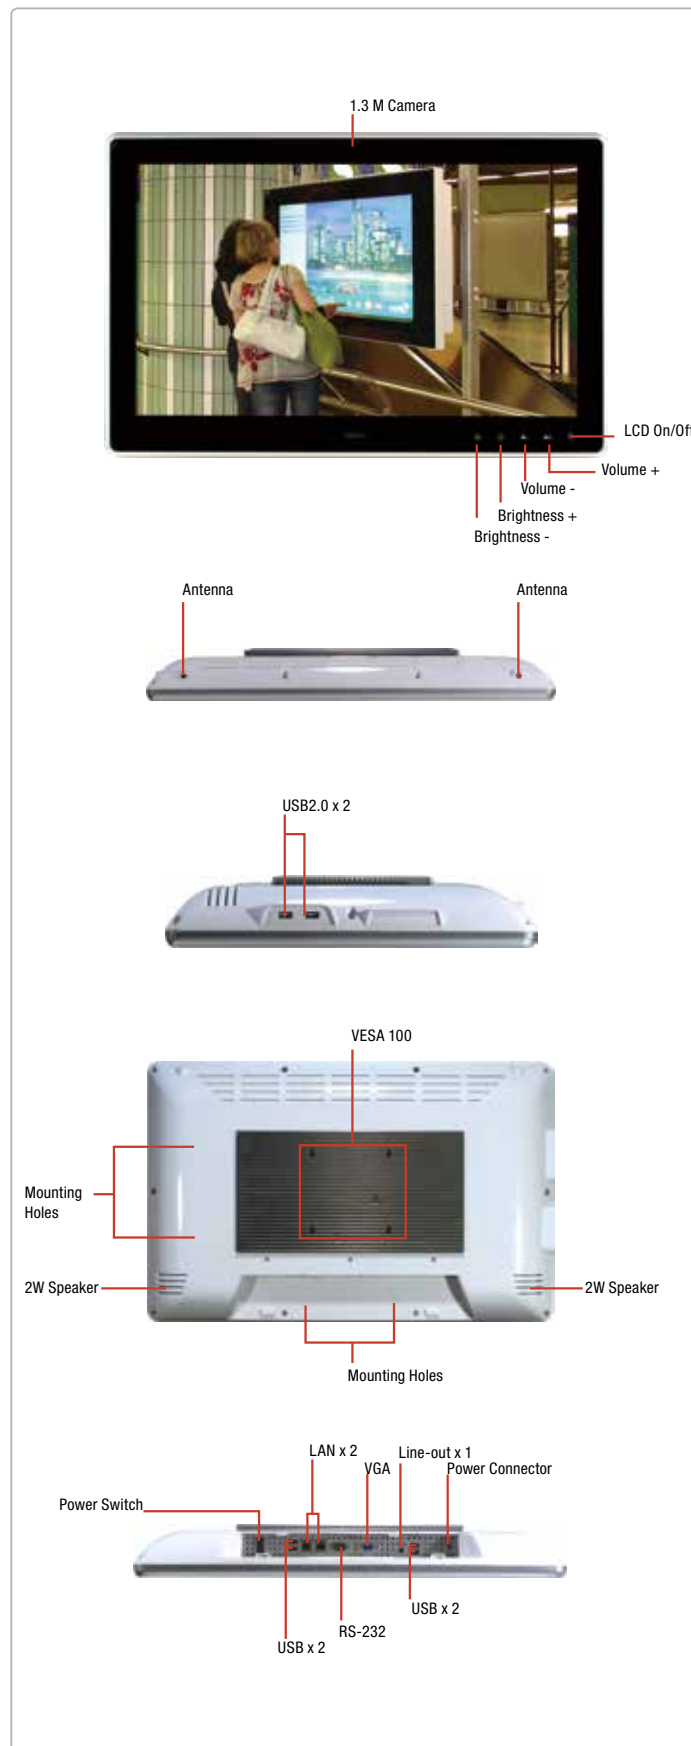

## Features

- 21.5" (1920 x 1080) Color TFT LCD Display
- AMD G-Series T56N Processor, 1.6GHz
- Wide Screen with P-CAP Multi-touch
- Anti-scratch Surface: 7H Surface
- IP65 Compliance Front Bezel
- Fanless System
- VESA 100




## Specifications

System	
Processor	AMD G-Series T56N Processor, 1.6GHz
System Memory	204-pin DDR3 SODIMM up to 4GB
LCD/CRT controller	AMD A50M
Ethernet	Realtek 8111E for 10/100/1000Base-TX, RJ-45 x 2
I/O Port	RS-232 x 1, USB 2.0 x 6, Line-out x 1, VGA out x 1, RJ-45 x 2, Lockable Power Input Connector, Power switch x 1
Storage Disk Drive	2.5" SATA Hard Disk Driver/ Cfast (Internal)
Expansion Slot	Mini PCIe card x 1
OS support	Window® XP, Window® 7, Linux Kernal 2.6.3 or higher
Mechanical	
Construction	IP65/NEMA 4 For Plastic Front Bezel, IPX1 For Plastic Chassis
Mounting	VESA 100, Wallmount
Dimension	21.5" x 13.7" x 2.34" (546mm x 348mm x 59.4mm)
Carton Dimension	26" x 19.52" x 7.87" (661mm x 496mm x 200mm)
Gross Weight	18.3 lb (8.3Kg)
Environmental	
Operating Temperature	32°F ~ 1031F (0°C ~ 45°C) w/airflow 32°F ~ 104°F (0°C ~ 40°C) w/o airflow
Storage Temperature	-4°F ~ 158°F (-20°C ~ 70°C)
Storage Humidity	10%~90% @40°C; non-condensing
Vibration	1g rms/ 5~ 500Hz/ operation – With HDD
Shock	20G peak acceleration (11 msec. duration) – With HDD
EMC	CE/FCC Class A
Power Supply	
DC input	DC12V , With Power Adapter w/ Lock (In Package)
LCD	
Display type	21.5" TFT-LCD, LED
Max Resolution	1920 X 1080
Max. Colors	16.7M colors (6/8-bit for R,G,B)
Luminance	250 cd/m <sup>2</sup>
Viewing Angle	170°(H), 160°(V)
Back Light	LED
Back Light MTBF (hours)	50,000
Touchscreen	
Type	Projected Capacitive Touch (two points)
Light Transmission	90%

# ACP-5210

## Dimension

Unit: mm

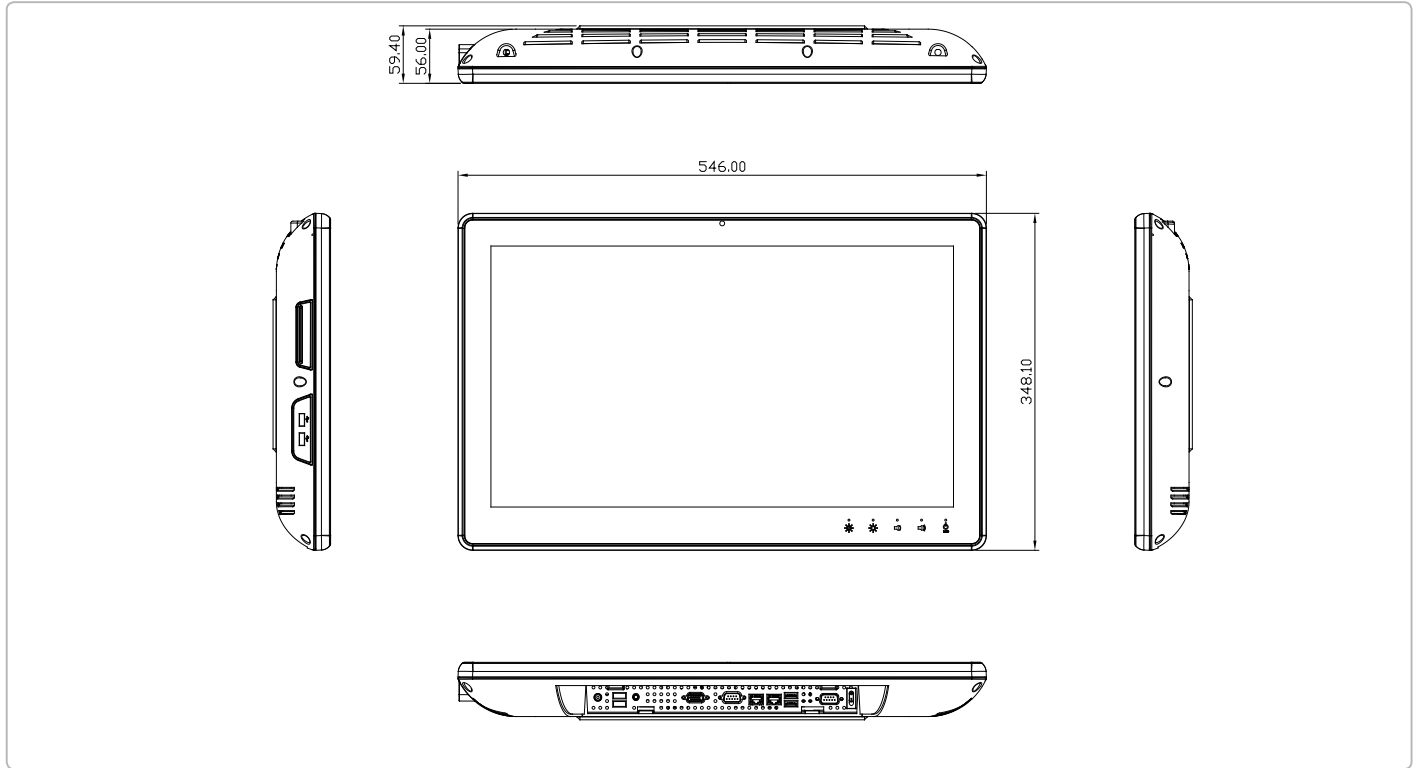

## Ordering Information

Part Number	Display Type	Max Resolution	Luminance	Backlight MTBF	CPU	LAN	USB 2.0	RS-232	RS-232/422/485	Storage	RAM	Display	Expansion	Mounting	Power	Temp.	Touch
ACP-5210HTT-A1-1010	21.5" TFT-LCD	1920 x 1080	250 cd/m <sup>2</sup>	50,000	AMD G-Series, T56N, 1.6GHz	2	6	1	0	CFast™ x 1 2.5" SATA HDD x 1	2G RAM	VGA x 1	Mini Card x 1	VESA 100	DC 12V	32°F ~ 103°F (0°C ~ 45°C) w/airflow 32°F ~ 104°F (0°C ~ 40°C) w/o airflow	Projected Capacitive Touch (Two Points)

## Packing List

- HDD Screws
- VESA Screws
- Anti-drop Kits
- Power Adapter
- Product DVD
- ACP-5210

## Optional Accessories

- **1702031802**  
Power Cord (US Type)
- **1702031803**  
Power Cord (European Type)
- **170203180E**  
Power Cord (Japanese Type)
- **9761518200**  
Smart Card Reader
- **9761518201**  
Camera
- **9761518206**  
MSR + Mounting Kit
- **9761518205**  
Scanner (2D) + Mounting Kit
- **P005212000**  
Plastic Cover for Cables
- **ARM-WK075-0**  
Wallmount Kit
- **9761215303**  
Wireless Module (b/g/n)
- **9761518209**  
RFID Module (13.56MHz)
- **PER-M20**  
Desktop Stand w/VESA 75/100

If you want to install more than 2 optional accessories, you have to disable one USB port. Please check with your representative if needed.